




**(10) International Publication Number**  
**WO 2004/035939 A1**

- |   |   |
|---|---|
| <p>(51) <b>International Patent Classification<sup>7</sup>:</b><br/>E04G 23/08, E01C 23/12, E21B 1/02</p> <p>(21) <b>International Application Number:</b><br/>PCT/NZ2003/000235</p> <p>(22) <b>International Filing Date:</b> 21 October 2003 (21.10.2003)</p> <p>(25) <b>Filing Language:</b> English</p> <p>(26) <b>Publication Language:</b> English</p> <p>(30) <b>Priority Data:</b><br/>522157                      21 October 2002 (21.10.2002)      NZ</p> <p>(71) <b>Applicant (for all designated States except US):</b> <b>ROCK-TEC LIMITED</b> [NZ/NZ]; Mangawhero Road, 2271 Matamata (NZ).</p> <p>(72) <b>Inventor; and</b></p> <p>(75) <b>Inventor/Applicant (for US only):</b> <b>ROBSON, Angus, Peter</b> [NZ/NZ]; Tower Road, RD1, 2271 Matamata (NZ).</p> | <p><b>E02D 7/08,</b></p> <p>(74) <b>Agents:</b> <b>MURPHY, Simon et al.;</b> Private Bag 3140, Level 12, KPMG Centre, 85 Alexandra Street, 2001 Hamilton (NZ).</p> <p>(81) <b>Designated States (national):</b> AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.</p> <p>(84) <b>Designated States (regional):</b> ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GO, GW, ML, MR, NE, SN, TD, TG).</p> |
|---|---|

[Continued on next page]

(54) Title: AN IMPROVED DEVICE

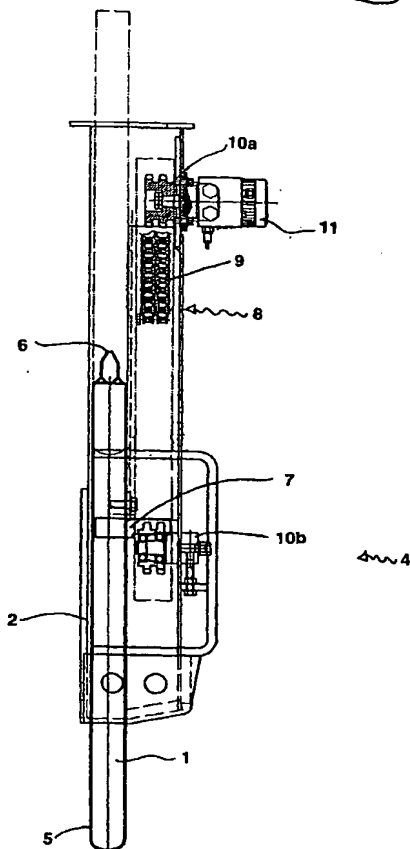

**(57) Abstract:** The present invention relates to a drop hammer assembly including a drop hammer configured with at least two end conditions, characterised in that the position of the end conditions can be reversed when required. Also claimed is a method of reversing the drop hammer with respect to the drop hammer housing.

**WO 2004/035939 A1**